


Horizontal Splice Closure – 144-288 Fiber (IP68 rating)

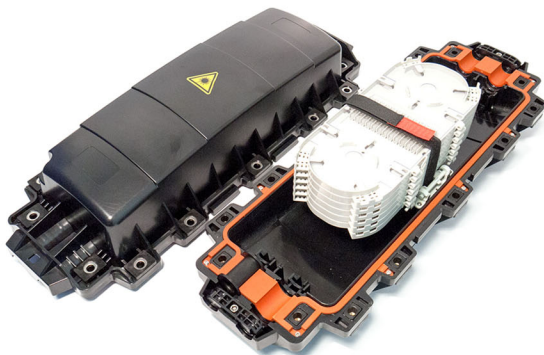

FEATURES

- Material: PC
- 2 inlet, 2 outlet splice closure
- Fire resistant, waterproof, and quake-proof
- Max. capability: 288 fiber
- Environment temperature: -40°C to +75°C
- Atmospheric pressure: 70~106Kpa
- Tested and inspected to the highest standards
- Dimensions inc. lid (LxWxH): 605mm x 215mm x 175mm

DESCRIPTION

Our horizontal splice closure is designed for straight through line/branching applications, ensuring protection from the environment and is suitable for underground deployment.

SPECIFICATIONS

Size	≤0.3dB
Weight per unit	4.7 kg
Inlet/outlet ports	4 total (2 per side)
Diameter of fibre cable	Φ8—Φ23 (mm)
Max. Closure Capacity	Bunched: 48—288 (Cores) Ribbon: max.1152 (Cores)
Material	PC