


## STA Loose Tube Cable 2-16 core

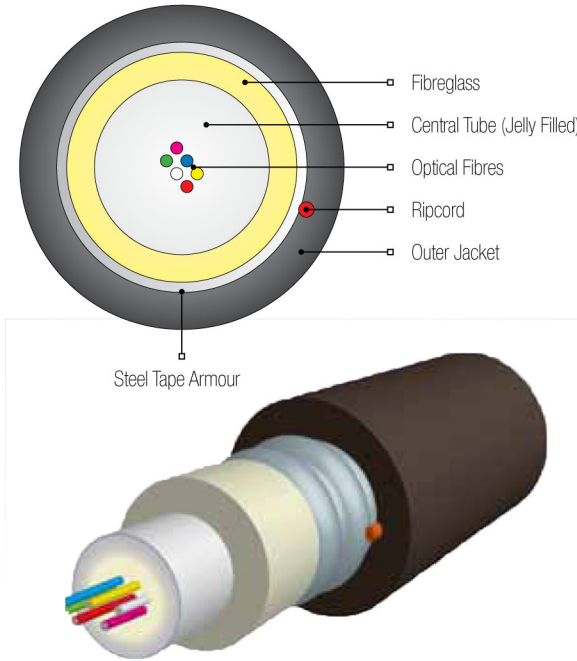

### FEATURES

- Choice of fibre type
- Choice of colour coded fibres
- High strength aramid-yarn strength member
- Choice of outer jacket material and colour
- OS1, OM1, OM2 and OM3
- Able to withstand impacts and high pressure

### CABLE CHARACTERISTICS

- 250µm colour-coded optical fibre
- Gel filled loose-tubes for fibre lubrication and water repelling properties
- Corrugated Steel Tape for superior protection
- Ripcord
- Durable outer jacket


### APPLICATIONS

- External duct and direct burial applications
- Harsh environments where impact and crush protection is demanded
- Ideal for water crossings e.g. rivers and lakes

LOOSE TUBE CABLE (2-16)		2	4	6	8	12	16	24
Fibre Count								
Weight	kg/km	~88						
Central Tube	mm	4.5						
Outer Diameter	mm	~9.6						
Tensile Load (LT)	N	1500						
Tensile Load (ST)	N	2700						
Min. Bend Radius	20x Outer Diameters							
Maximum Length	m	2000						
Temperature	°C	-40 ~ +70						
Colour	Black							
Crush Resistance	N	2000						

### STANDARDS

Environmental and mechanical tests according to:  
EN 187000 and CEI 60794.

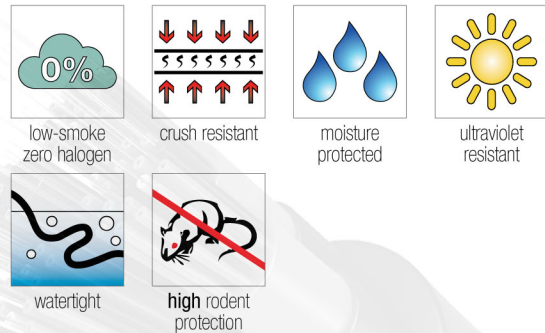

### Fibre Colour Options:

