



Fiber Access Terminal-2 Cores

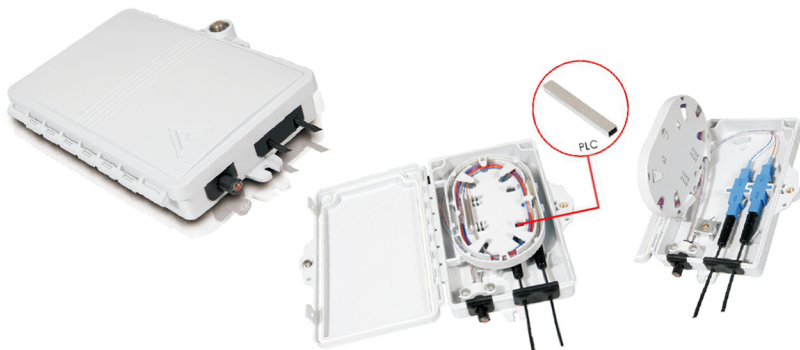

STRUCTURE DIAGRAM & DESCRIPTION

Fiber access termination box is able to hold up to 2 subscribers. It is used as a termination point for the feeder cable to connect with drop cable in FTTx network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid protection box.

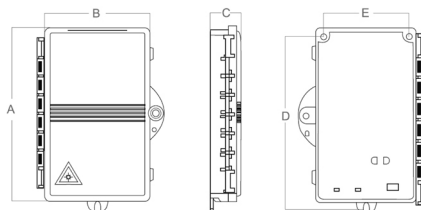

FEATURES:

- Water-proof design with IP-66 Protection level.
- Integrated with splice cassette & cable management rods.
- Manage fibers in a reasonable fiber radius condition.
- Easy to maintain & extend the capacity.
- Fiber bend radius control more than 40mm.
- Suitable for the fusion splice or mechanical splice.
- 1*2 Splitter can be installed as an option.
- Efficient cable management.
- 2 ports cable entrance for drop cable.

STANDARD ACCESSORIES:

- Splice cassette and cable management tool, installation nuts and bolts, protection sleeves, hose clamp, rubber seal for cable entrance.

OPTIONAL ACCESSORIES:

- SPOle ring, Extra lock and key

PART NUMBER - **WBIP66-2SC**

CONFIGURATION

Material	Size	Max Capacity		Installation Size	Weight	Color
PC + ABS	A*B*C (mm) 168*102*32	SC 2 Ports	LC 4 Ports	PLC 1x2(SC)	159*80 D*E(mm)	0.8kg Light Gray

* All fibre access terminal boxes are available in Black/Ivory white colour.