


In-Line Fibre Optic Splice Closure, 288F Max



STRUCTURE DIAGRAM & DESCRIPTION

In-line type fiber closure made of high quality stainless screws and accessories; silica rubber seal with excellent sealing performance and easy installation

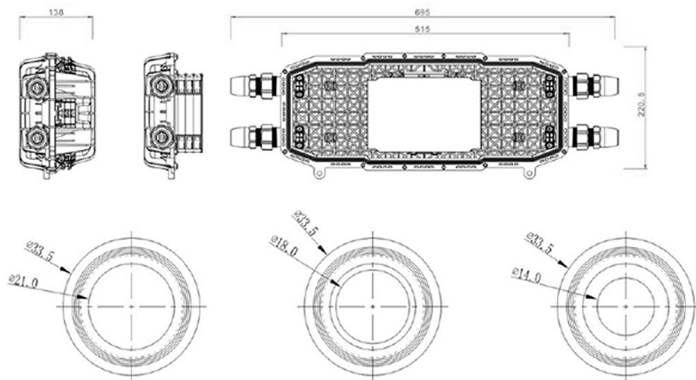

FEATURES:

- Four cable ports, two on each side
- Max. Capacity: 288 C (Tray capacity: 72C *4trays) for single fiber
- Dimension: 695*220.5*138mm (LxWxH)
- Application cable dia. : 10~21mm
- Tray color: White
- Material: PP
- Sealing way: Mechanical Sealing
- A good mechanical property and resistance to weathering, firm and wearable
- Apply for aerial, buried and pipe-lined

TECHNICAL PARAMETERS:

- Working temperature: -40°C~±65°C
- Atmospheric pressure: 70-106kPa
- Axial tension: >1000N/ 1min
- Stretching resistance: 2000N / 10 square centimeter (1 min)
- Insulation resistance: > 2*104MΩ
- Voltage strength: 15KV/1 min, no arcover or breakdown
- Temperature cycle: -25°C~+60°C, inner pressure: 60(+5)kPa, cycle:10 times, the decrease of pressure can't exceed 5kPa at room temperature
- Reuse available
- IP67