



E2 / UPC-E2 / E2A Connector / Adapter



E2A



OPTIFAB E2 or E2A patchcord and pigtail connectors feature a spring-loaded shutter which fully protects the ferrule from dust and scratches. The shutter closes automatically when the connector is disengaged, thus blocking impurities. The E2 or E2A connector is compliant with European (EN 186270) and International (IEC 61754-15) standards.

FEATURES:

- E2, UPC and E2A polishing options
- Simplex and Duplex configuration
- Easy and safe insertion and removal
- Robust construction
- Excellent choice for singlemode applications
- Colours available: black, blue and green



UPC




MM

CONNECTOR PERFORMANCE - SINGLEMODE


Insertion Loss	Max. 0.3dB; Typical 0.2dB
Return Loss	UPC > 50dB Typical 55dB E2A > 60dB Typical 65dB

CONNECTOR PERFORMANCE - MULTIMODE

Insertion Loss	Max. 0.5dB; Typical 0.3dB
----------------	---------------------------

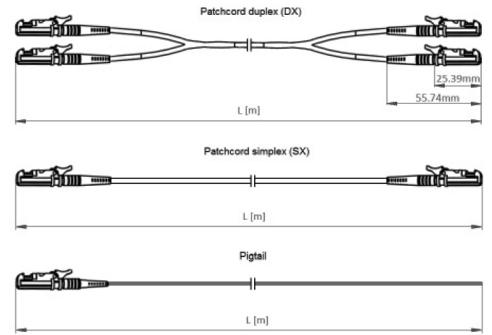

EXAMPLES OF PATCHCORDS AND PIGTAILS

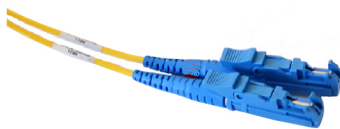


E2 duplex patchcord



E2A simplex patchcord



E2 MM duplex patchcord



E2A pigtail