

Sliding LC/SC Patch Panel – 24 Duplex Adapters



OPTiFab 1U rack-mounted Sliding LC Patch Panel is available unloaded or pre-loaded with up to 24 LC duplex adapters, multi mode or single mode. It features 4x 20mm cable entry/exit holes, and 2x 10mm blown fibre holes. The panel features an interchangeable face plate, meaning if you decide to change connectors and adapters in a certain network, you can replace the face plate without needing to change the whole panel. The panel's lower tray features punched screw holes for securing our fibre management trays, and pressed loops for securing fibre in place.

The panel is constructed from cold-rolled steel, and finished with a durable and aesthetic matte-black powder-coating. Other finishes such as grey powder-coat and natural stainless steel are also available.

FEATURES:


- Interchangeable face plate with hidden screws on base
- ST, FC, SC-Simplex, SC-Duplex, LC-Duplex, LC-Quad
- Minimum Fibre Capacity = 24
- Maximum Fibre Capacity equal to 96-Fibres (LC-Quad)
- Fixed and Sliding configurations
- Colour Finish – Black, RAL 9005
- RoHS Compliant
- Operating Temperature to -25 Celsius to +40 Celsius
- Weight 2.59KG
- Supplied with fibre-management kit

SPECIFICATIONS

Compatible adapters	24x LC Duplex/SC Simplex/MTRJ
19 inch rack fitting	1U
Weight (empty)	1.9kg
Weight (packaged)	2.5kg
Cable Entry	4x 20mm, 2x 10mm
IP Rating	IP20
Material	16 gauge cold-rolled steel
Dimensions (panel only)	W: 424mm; H:44mm; D: 222mm



FRONT PLATE

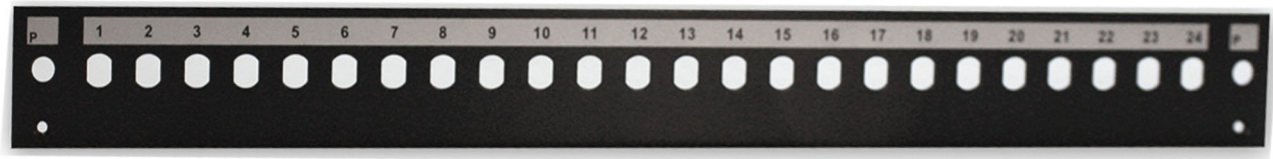

LC duplex / SC simplex / MTRJ

