


SC/APC Pre-Connectorised 2F MINI 2.5 Pigtail Reel

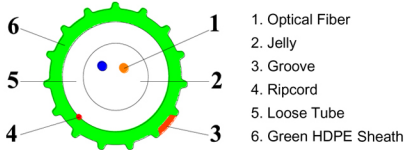

FIBRE UNIT STRUCTURE & DESCRIPTION

The SC/APC Pre-connectorised 2F MINI 2.5 is routed from the 5/3.5mm microduct into the ODFD shelf after blowing installation.

The installation length is up to 150m, and the packaging drum is suitable to be mounted on the Ericsson Blowing Gun.

TECHNICAL PARAMETER

Fibre Count	2 Fibres (G.652.D)
Outer Diameter (mm)	2.5±0.1
Weight (g/m)	6.0
Min Bend radius (mm)	50
Attenuation 1310/1550nm	≤0.36/0.22 dB/km
Temperature range	Storage : -30°C ~ +70°C Operation : -40°C ~ +75°C Installation : -5°C ~ +50°C

FEATURES:


- 2 Fibres MINI 2.5
- Suit for G.652.D Optical Fiber
- Complete accessories, less manpower, lower installation time.



SC/APC Connector
(Φ0.9mm,1.5m)

Insertion Loss	≤0.3 dB
Return Loss	≥60.0 dB
Temperature range	Storage : -30°C ~ +70°C Operation : -40°C ~ +75°C Installation : -5°C ~ +50°C

PACKAGING



LENGTH	DRUM SIZE (MM)
2 SC/APC + 50m MINI 2.5	φ265×100
2 SC/APC + 100m MINI 2.5	φ265×100
2 SC/APC + 150m MINI 2.5	φ265×100

Box Size (mm) Length×Wide×High	590 × 560 × 320
Number	12 drums / box
2 SC/APC + 150m MINI 2.5	50m : 10kg 100m : 14kg 150m : 18kg

